



Horner Electronic Co., Ltd
Address: Maobao building
Shenhui Road Buji Dis.
Shenzhen City, China
TEL:+86 75528558841
[Http://www.safe-alarm.com](http://www.safe-alarm.com)
Email: info@safe-alarm.com

Product Catalog

- ☆ GSM MMS Alarm system
- ☆ GSM home Alarm
- ☆ GSM Industry Alarm
GSM Power Alarm
GSM/PSTN DUAL net Alarm
- ☆ GSM Wireless Fixed Terminal

Date: October 17, 2009



G-100sd

Feature:

1. Aluminum case is durable.
2. Connect with camera with 30 megapixels
3. Built-in Li-ion backup battery, automatic recharge.
4. Support SD card to save photos.
5. Support moving motion photo taken
6. Support wireless remote enable arm, disarm, panic help with photo capture
7. Support wireless PIR motion detector, active photo-electric beams, smoke fire detector, gas leakage detector and so on.
8. With 16 wireless zone, 2 wired zone
9. One wireless relay output to enable control lights
10. Horn siren output, mute/audible siren sound seletable
11. SD card: 256M to save about 4000pcs; 2G for 28800 pcs
12. 5 groups alert telephone call and message
13. Spot monitor by telephone while alert call
14. Remote control system through telephone. e.g. monitor or photo taken
15. Password protection
16. SMS alert in English or Chinese
17. SMS remote control enable arm or disarm system, monitor spot, photo taken and so on
18. MMS alert to the set mobile phone enable user view spot.
19. MMS alert to the two set E-mail boxes
20. By internet, it can transport images to Central station in Computer.
21. SMS to capture photo any time by mobile phone.
22. SMS to capture photo any time to the set mobile phone by telephone
23. Size of wireless transmitting image: QCIF(160x128), CIF(320x240), VGA(640x480)

Specification

1. GSM module with three bands: 900/1800/1900MHz
2. Voltage: 9-12v Standby current: 20mA.
3. Operation temperature: -40~+85°C
4. Support PHASE 2/2 + protocol
5. Emitting power: (2w)/EGSM900, (1W)/GSM1800 GSM1900
6. Receiving code: SK



1. This product uses a GSM SIM card. It can send MMS images to MMS-supported mobile phones with a color display or to an e-mail address.
2. Remote control: Control & configure the camera with SMS commands from a mobile phone.
3. Real-time audio: Call the camera number (SIM card) to listen in voices.
4. PIR motion detection: Detect and alarm any motion within the monitoring area.
5. Sensor detection: Max connects 15 sensors such as door magnet sensor, infrared body sensor, smoke sensor, gas sensor etc. Any sensor active will alarm by SMS.
6. Infrared light: Even in a dark environment, the camera can get a clear image with the built-in infrared LEDs.
7. Special Camera: 300,000 pixel CMOS camera, get clear image for MMS.
8. Send images to mobile: The camera will send MMS images to your mobile phone and you can check them anywhere.
9. Send images to email: The camera can send MMS images to a pre-set email and you can check the image in your email anytime.
10. Multimode alarm: Camera can send alarm messages by SMS, MMS, e-mail or standard phone-call.
11. Fixed time monitor: Monitor schedule can be set flexibly with multiple time-intervals.
12. Easy installation: Wireless connection. The product can be installed at any place you wanted.
13. Accessory: Includes 2 remote controls for manual operation on/off and panic button.
14. Built-in Lithium battery: Rechargeable battery ensuring operation in case of external power failure.
15. GSM module with four bands: 900/1800 or 850/1900MHz

If the image size is 160×128 or 320×240, the maximum number of the images can be requested at one time is 8, the image quantity number should be set from 1 to 8. As the same, the number should be set between 1 to 2 if the image size is 640×480.



MODEL;C80

- 1.This product use GSM SIM card. It can send MMS images to MMS supported mobile phone with a color display or to an e-mail address.
- 2.Remote control: control & configure the camera with SMS command from mobile phone.
- 3.Rea-time audio: call the camera number (SIM card) to listen in voices.
- 4.PIR motion detection: Detect and alarm any motion within the monitoring area.
- 5.Sensor detection: Max connects 9 sensors such as door magnet sensor, infrared body sensor, smoke sensor, gas sensor etc. Any sensor active will alarm by SMS.
- 6.Infrared light: Even in dark environment, camera can get clear image with the built-in infrared LEDs.
- 7.Special Camera: 300,000 pixel CMOS camera, get clear image for MMS.
- 8.Send images to mobile: The camera will send MMS images to your mobile phone and you can check them anywhere.
- 9.Send images to email: The camera can send MMS images to pre-set email and you can check the image in your email anytime.
- 10.Multimode alarm: Camera can send alarm messages by SMS, MMS, e-mail or standard phone-call.
- 11.Fixed time monitor: Monitor schedule can be set flexibly with multiple time-intervals.
- 12.Easy installation: Wireless connection. The product can be installed at any place you wanted.
- 13.Accessory: Include 2 remote controls for manual operation on/off and panic button.
- 14.Built-in Lithium battery: Rechargeable battery ensuring operation in case of external power failure
- 15.GSM module with four bands: 900/1800 or 850/1900MHz
- 16.mage size is 480 x320 or 320×240



Model C90

Features:

1. IR thermo image monitoring and detection for moving objects, the double detection technology can eliminate the false alarm caused by environmental reasons.
2. It has real-time mobile AV alarm and e-mail video image back-up receiving model.
3. You can monitor the site by mobile phone at any time.
4. You can use mobile to monitor the voice at the remote site.
5. Alarms will activate the pre-recorded voice messages and inform the users immediately.
6. Easy operate with a wireless remote control device by simple mobile instructions.
7. You can setting if the siren and beacon device to be activated when alarm happen.
8. Under emergency situation EMSD key can silently inform any designated users.
9. If it build-in battery, device can be still operating during power failure.
10. If it With IR night vision camera, it provides full time 24 hours day and night monitoring function.
11. can connect 1-4 camera option

Specification


PIC Format	JPEG
Resolution	320X240 /480 X320 pixels
Remote Control Distance	< 30 meters
Backup Battery	depends on battery capacity
Working Temperature	0-50°C (32-122°F)
Relative Humidity	10-90%, non-condense

Package:

Standard accessories

Host x 1, Antenna x 2, Power adaptor x 1, Remote Control.x 2
user Manual x 1, PIR x1, Door sensorx 1

II. GSM SMS Alarm

<p style="text-align: center;">Picture</p>  <p>Packing List:</p> <p>Alarm unit x 1 Remotecontroll x 2 Door sensor x 2 Power adaptor x1 Wireless antana x 1 User manual x 1</p> <p>GSM frequency: GSM900/1800MHZ GSM850/1900MHZ</p> <p style="text-align: center;">Packaging Method</p> <p>1 set into one gift box 5 gift boxes into one carton.</p>	<p>Model Number:w8 <i>Mainly used in House,office,Factory,etc.</i></p> <p>Feature and main function</p> <p>Mini alarm</p> <ol style="list-style-type: none"> 1.You can connect 9 wireless PIR sensor, door/window contact, smoke detector, gas leakage detector, glass break sensor etc. 2.can Arm/Disarm each zone separately 3.Can send SMS to 5 mobile phone No. and Auto-dial 5 phone No. while alarming. 4.You can call the mainframe any time and listen what happened in the alarm area. 5.You can arm/disarm and program the system by CELL PHONE SMS or phone 6. Report the alarm zone by SMS and can be remote controlled by SMS and telephone. 7. Modify name of wireless zones and check the status of alarm mainframe by SMS. 8.With password protection while the system is working. 9. Switch to Backup rechargeable battery when the power is failure or cut by intruder and will send SMS and call you.If the power is recoverd, it will also send sms to you. 10.Wireless signal transmission and easy to use, and don't fear for cutting wire by the intruders. 11. Wireless Emergency function(24 hours zone):you can press the button to alarm immediately in order to get help if in emergencies. 12.Can send alarm signals to monitoring center through GSM network, such as the police station
--	--

Picture



Packing List:

Alarm unit x 1
Remotecontrol x 2
Door sensor x 1
Power adaptor x1
Wireless antenna x 1
User manual x 1

GSM frequency:

GSM900/1800MHZ
GSM850/1900MHZ

Packaging Method

1 set into one gift box
5 gift boxes into one carton.

Model Number:w8

Mainly used in House,office,Factory,etc.

Feature and main function

20 second self-record voice message will be send out when is alarming

Auto alarm or disalarm will be set account to your time table

GSM 850/900/1800/1900 bands alarm base for the world

Full duplex communication with the base

Monitor living surroundings

Voice and message alert

Set alarm on or off by controllor

Call in set alarm on\off\monitor\output

Send SMS to set alarm on\off\monitor\output

5 group phone + room number

1 group alarm center monitor phone

2 group phone to report alarm and disalarm status

Programable 7 group alarm text messages

3 zone for wire director

16 zone for wireless director

Easily set on or off every wire or wireless director

1 relay output to power on camera when alarm

2 output for cooker\air condition

SMS inform external power failure or recovery

Indoor and outdoor alarm controllor

Picture	Model Number:w11 <i>Mainly used in House,office,Factory,etc.</i>
<div data-bbox="153 600 528 846" data-label="Image"> </div> <p data-bbox="124 947 264 974">Packing List:</p> <ul data-bbox="124 1010 464 1473" style="list-style-type: none"> Main panel Magnetic Door Sensor Two Wireless Remote Controls Wireless Programming Keypad PIR Motion Sensor Mini Siren 12vDC Power Supply User Manual <p data-bbox="124 1541 368 1568">Packaging Method</p> <p data-bbox="124 1581 448 1653">1 set into one gift box 5 gift boxes into one carton.</p>	<p data-bbox="555 293 1430 320">English language SMS and voice reminder, Spanish/Chinese/Russian for optional</p> <p data-bbox="555 333 815 360">With Partial arm function</p> <p data-bbox="555 374 963 400">With 2 wired zones, 12 wireless zones</p> <p data-bbox="555 414 1112 441">With 3 Relay output to control your home appliances</p> <p data-bbox="555 454 1107 481">With voice reminder when users operate the system</p> <p data-bbox="555 495 884 521">Work with external Microphone</p> <p data-bbox="555 535 844 562">Work with external speaker</p> <p data-bbox="555 575 1259 602">Auto send SMS to remind users when GSM signal becomes weak</p> <p data-bbox="555 616 1477 687">Work with wired & wireless PIR, door/window sensor, smoke/gas detector, glass break sensor etc.</p> <p data-bbox="555 701 1179 728">Each wireless zone can match countless wireless sensors.</p> <p data-bbox="555 741 1358 813">Users pre-record voice in the system and play the voice when system gives alarm</p> <p data-bbox="555 826 1339 853">Send SMS to 3 mobile phones and auto-dial 3 phones to inform the users</p> <p data-bbox="555 866 1390 938">Users use any phone to listen what is happening inside the house whenever & wherever.</p> <p data-bbox="555 952 1409 978">Program and control the system by keyboard, remotes, SMS or phone remotely.</p> <p data-bbox="555 992 1477 1064">Send SMS to inform users which zone is alarming and will call users or the police after system is triggered</p> <p data-bbox="555 1077 1043 1104">Use SMS to change the zone name & content</p> <p data-bbox="555 1117 1062 1144">Use SMS to inquiry the system status wherever</p> <p data-bbox="555 1158 1461 1229">With password protection, System will inform users when input wrong password for 3 times</p> <p data-bbox="555 1243 1482 1314">Use any phone to call the system and anyone inside the house -can talk to you through a speaker.</p> <p data-bbox="555 1328 1043 1355">Wireless Emergency function (24 hours zone)</p> <p data-bbox="555 1368 1474 1440">With Backup rechargeable battery, system can work even when the power is failure or cut by intruder.</p> <p data-bbox="555 1453 1313 1480">Send SMS to inform you when the power is failure or returns to normal.</p> <p data-bbox="555 1494 1466 1565">Support monitoring center through GSM network to the police station or management centre</p>



<p>Picture</p>	<p>Model no.: W-G10</p>
<div data-bbox="108 293 523 595" data-label="Image"> </div> <p>Packing list</p> <p>Alarm panel x 1</p> <p>Wireless antena x 1</p> <p>Keypad x1</p> <p>Siren x 1</p> <p>Remote control x 2</p> <p>PIR x 1</p> <p>Door sensor x 1</p>	<p>Main Function</p> <p>With English/ Spanish/ Tailanguage/ Russian</p> <ul style="list-style-type: none"> * 9 wireless guarding zones(1 SOS alarm zone, 1 fire alarm zone, 1 external power failure alarm zone, the other 6 wireless guarding zones can be defined by user), 2 hardwire guarding zones. * Send SMS to 3 mobile phones automatically while alarming. * Call 3 phones automatically while alarming and drive?wiretap. * Arm/disarm by wireless keyboard, remote controller, SMS or remote telephone/mobile phone. * Set the host by wireless keyboard, SMS or remote phone. * Report guarding zones remotely by SMS or voice. * Modify the name of wireless guarding zones and inquire the status of host by SMS demand. * With voice reminder while the host is working. * Support dialog. * With standby rechargeable battery. * The alarm host automatically stores system status, while its power is off. * Connect with the alarm center through GSM network.

Picture	Model Number:w20 <i>Mainly used in House,office,Factory,etc.</i>
<div data-bbox="137 315 405 521" data-label="Image"> </div> <p data-bbox="124 533 236 562">Includes:</p> <ul data-bbox="124 573 448 1308" style="list-style-type: none"> <li data-bbox="124 573 448 607">One alarm host (main unit) <li data-bbox="124 613 448 689">One wireless door/window magnetic contact <li data-bbox="124 696 448 730">One wireless PIR sensor <li data-bbox="124 736 448 770">Two remote controllers <li data-bbox="124 777 448 810">One siren <li data-bbox="124 817 448 851">One AC adapter <li data-bbox="124 857 448 891">One English user manual <li data-bbox="124 898 448 931">Specification of main unit: <li data-bbox="124 938 448 972">Output power: DC12V <li data-bbox="124 978 448 1012">Input power: AC110V to 220V,50Hz or 60 Hz <li data-bbox="124 1019 448 1052">Working hours of standby <li data-bbox="124 1059 448 1093">Battery(DC8.4V): <li data-bbox="124 1099 448 1133">More than 15 hours <li data-bbox="124 1140 448 1173">Wireless frequency for above <li data-bbox="124 1180 448 1214">accessories: <li data-bbox="124 1220 448 1254">315MHZ/433MHZ 	<p data-bbox="515 284 919 318">Description and Main functions</p> <p data-bbox="515 324 1021 358">With English / France / Chinese version</p> <ul data-bbox="515 365 1485 1350" style="list-style-type: none"> <li data-bbox="515 365 1485 441">. 8 wireless zones(1 wireless SOS zone, 1 wireless fire alarm zone, the other 6 wireless zones can be defined by user) and 1 external power failure alarm zone. <li data-bbox="515 448 1485 604">3.You can connect wireless emergency button, wireless PIR sensor, wireless door/window contact, wireless smoke detector, wireless gas leakage detector, wireless glass break sensor etc. Each wireless zone can match numberless wireless sensors. <li data-bbox="515 611 1485 645">4. With LCD display and Control keyboard on the mainframe. <li data-bbox="515 651 1485 728">5. Send SMS to 3 preset mobile phone numbers and Auto-dial 3 preset phone numbers while alarming. <li data-bbox="515 734 1485 810">6.You can call the mainframe any time and listen what happened in the alarm area. <li data-bbox="515 817 1485 851">7.With AC power status monitor function and password protection function <li data-bbox="515 857 1485 891">8. With fixed time arming/partial arming/disarming function <li data-bbox="515 898 1485 931">9. Control the alarm system by Control keyboard ,remote control or SMS. <li data-bbox="515 938 1485 972">10. Modify 8 wireless zones' name and check the system status by SMS. <li data-bbox="515 978 1485 1055">11. Define the 8 wireless zones as arm/partial arm by control keyboard on the mainframe. <li data-bbox="515 1061 1485 1137">12. Switch to Backup rechargeable battery when the power is failure or cut by intruder. <li data-bbox="515 1144 1485 1220">13. Wireless Emergency function(24 hours zone):you can press the button to alarm immediately in order to get help if in emergencies. <li data-bbox="515 1227 1485 1261">14.Wireless signal transmission,and don't fear for cutting wire by the intruders. <li data-bbox="515 1267 1485 1344">15.Can send alarm signals to monitoring center through GSM network, such as the police station <p data-bbox="515 1350 724 1384">GSM frequency:</p> <ul data-bbox="515 1391 751 1471" style="list-style-type: none"> <li data-bbox="515 1391 751 1424">GSM900/1800MHZ <li data-bbox="515 1431 751 1464">GSM850/1900MHZ

Picture	<p style="text-align: right;"><i>Mainly used in industry.</i></p> <p>Model Number:w-50</p>
<div data-bbox="124 577 571 857" data-label="Image"> </div> <p>Packing List</p> <p>One alarm host (main unit) One wireless keyboard One remote controllers One siren One AC adapter One English user manual Specification of main unit: Output power: DC12V Input power: AC110V to 220V,50Hz or 60 Hz Working hours of standby Battery(DC8.4V): More than 15 hours Wireless frequency for above accessories:315MHZ/433MHZ</p>	<p>Description and Main functions</p> <p>Color LCD screen, keypad with blue light when operate</p> <ul style="list-style-type: none"> -Support 4 wireless emergency button, 4 wireless fire detectors, 16 remote controllers -32 wireless intruder detectors, can support 99 wireless detectors at most -8 wired zones: zone 1 and zone 2 special for wired door/window magnetic contact -can show the door/window open with voice, LCD and SMS. -Low voltage reminder for sensors by LCD,voice & SMS -6 mobile phone numbers for SMS alarm and 6 call alarm phone numbers -Humankind voice guide and three level password protection -Recording warning voice -Two auto-arm time, two auto-disarm time and one auto-partial arm time available for programmed -2²⁰ wireless encode reduce the rate of same code greatly -Learning code for wireless sensors and accessories -Two-way communication available in alarm mode -Handfree mobile phone. -SMS & DTMF command control & program. -Modify name of wireless zones by SMS -Four way arm/disarm: keypad, remote, phone and SMS -Call the alarm host any time and listen what happened in the alarm area. -Entry delay alarm and panel opened alarm -Internal MIC or external high sensitivity MIC (optional) -Internal antenna or external antenna(optional) -External power failure alarm -Working with monitoring center, such as police station <p>GSM frequency:</p> <p>GSM900/1800MHZ GSM850/1900MHZ</p> <p>Packaging Method</p> <p>1 set of into one gift box 5 gift boxes into one carton.</p>

Picture	Model Number:w30 <i>Used in 10KV power electric transformer,power line,etc.</i>
<div data-bbox="159 302 486 828" data-label="Image"> </div> <p data-bbox="124 907 545 1724"> The specification of main unit Electric power network: connect mode: YPhase-Neutral rated work voltage: AC220V Phase-Neutral lowest work voltage: AC110V Phase-Neutral highest work voltage: AC270V Standby battery: DC12V/1.2AH (Lead Acid battery),or DC12V/1AH (Ni-MH battery) Anti-electromagnetic interference: IEC55022 Insulation level: grade B Protection level: IP55 Biggest capacity of insurance tube: 3A Temperature: -10℃~+55℃ Humidity: ≤ 95% (non-condensation) </p> <p data-bbox="204 1780 466 1809"> Packaging Method </p> <p data-bbox="124 1818 446 1892"> 1 set of into one inner box 6 inner box into one carton </p>	<p data-bbox="571 286 973 315">Description and Main functions</p> <ol data-bbox="571 324 1484 1512" style="list-style-type: none"> 1. With 8 routes of wired input alarm. 2. Monitor 3 phase loss voltage and single phase failure of the electric distribution network. 3. Can connect line-cut/movement/vibration sensors etc. It will alarm when power transformer is damaged or moved. 4. Send SMS to 6 preset mobile phone numbers and dial 2 phone No. automatically while alarming. 5.Support settings through wireless keyboard or remotely by telephone or SMS. 6. Can program the alarm mainframe and check its status by SMS demand. 7. Can define the installation location by SMS demand. 8. Can report the communication status of alarm mainframe in fixed time everyday. 9. with fixed-time arming/disarming function. 10. Completely sealed aluminum outer shell: waterproof, Antiseptic, fireproof,suitable for outdoor use. 11. Resist electromagnetic interference, lighting and thunder 12. The system has power-off protection function. When the external power supply is damaged or the power is off, the system can continue to work with a backup battery. 13. Can install the solar battery that can supply the power for alarm mainframe and charge the backup battery. 14. External power failure alarm: when the system checks out that there is something wrong with the external power or the external power is off for more than 2 seconds, it will alarm immediately 15.Anti-dismantle function,It will alarm immediately if the cover opened by someone. 16.Can send alarm signals to monitoring center(such as the police station) through GSM network, <p data-bbox="571 1534 917 1691"> GSM frequency: GSM900/1800MHZ GSM850/1900MHZ Size: 450(L)*330(W)*500mm(H) </p>

picture

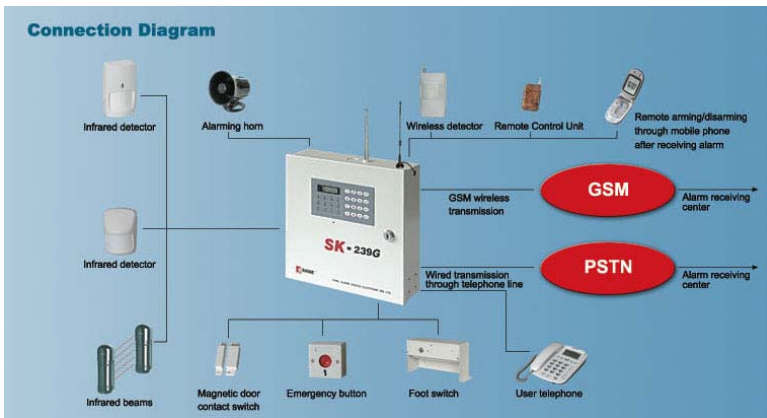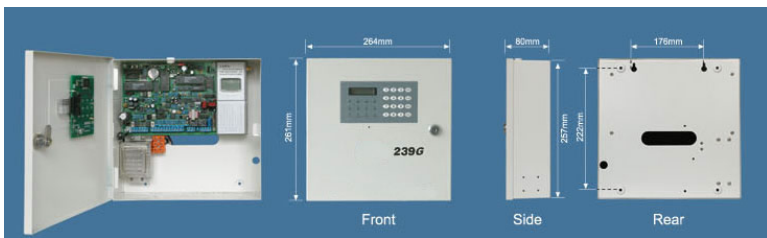

GSM/ PSTN MODEL: W239

Specifications

Alarm communications: transmitting alarming signal by PSTN dialling and GSM dialing

Power supply: AC220V±10%、50HZ

Alarm communication protocol: CK,Contract ID(ADEMCO)

Spare power supply: DC 12V 7Ah maintenance-free accumulator

Number of zones: 8 wire +8 wireless zones

Max output power capacity: DC 12V 1200mA

Programming mode: keyboard Programming and remote Programming Applicable **temperature** -10~55℃

alarm response time: 200~800ms Applicable humidity <90%

Memory capatility of alarming telephone numbers; more than 5 groups of alarming telephone numbers

outPut of power supply(capable of turn-off): DC 12V 500mA

Arming/disarming mode: By remote control unit、 keypad,regional telephone remote Control, timer,Chinese short message

Power supply for alarming: DC 12V 500mA

GSM module: 900/1800M dual-band

Alarm linked output: NO/NC , Load 1A 120VAC/24VDC

Data memory: in inquiry 1 record for power-on time,10 for arming/disarming times, and 4 for alarm information

installation style: wall-hanging or embedded

voice recording: 120s section optional

Dimensions(L·W·H): 264×80×261mm


Wireless receipt: 315M(433M optional)and learning of code checking

Weight(plus baltery) Approx.3kg (Approx.5.4kg)

III. GSM/CDMA Wireless fixed Terminal

Picture	Model Number:w-D8
	<ol style="list-style-type: none"> 1) Supports both GSM networks. 2) Simple to install and easy to maintain 3) Allow PIN code entering and reciprocal phone-card lock 4) Mobile phone board item and Industrial module item are optional 5) Polarity reversal signal for metering 6) 3.5dBi gain antenna 7) Compatible to PABX 8) Support Caller ID and Hands free 9) Outside antenna 10) Incoming numbers and dialing numbers block enable 11) Cost rate setting enable 12) Time, date, signal intensity display enable 13) LED Indicators for signal and power status 14) Blue and green background LCD display are selectable <p>Specifications:</p> <ol style="list-style-type: none"> 1) Networks support: GSM850/900/1800/1900MHz 2) Operation Temperature: -10°C -- +45°C 3) Power supply: DC12V 4) Sensitivity: -104dB 5) Stand by hours: 48 Hours 6) Talk time: 2-6 Hours 7) Charging time: 6 hours 8) Peak power consumption: 2W 9) Connectors: SMA antenna connector (TNC optional) 10) Atmospheric pressure: 86~106Kpa 11) Power consumption: static ≤ 25 mA, emission ≤ 500 mA 12) Antenna: Gain: 3.5dB (all directional) 12 dB (Certain/selection) <p>Packing:</p> <ul style="list-style-type: none"> ○ Product dimension: L192x W138 x H40mm ○ Gift box dimension: L265x W170x H64mm ○ Carton dimension: L355x W273 x H360mm 10pcs/carton ○ N.W: 0.4kg G.W: 7.8kg

IV. GSM Car Alarm

Picture	GSM GPS Car alarm -Model Number: -g118 v
 <p>GSM frequency: GSM900/1800MHZ GSM850/1900MHZ</p> <p>Packaging Method 38pcs into one carton.</p>	<p>Description and Main functions Functions and Features</p> <ol style="list-style-type: none"> 1. Apply to protect all type of cars, trucks, taxi, jeeps as well as other automobiles. 2. With Chinese/English/Russian/Czech/Spanish/ Turkish voice reminder 3. Friendly human voice reminder. The user needn' t memorize any command to operate the system. . 4. Remote open/close car door and trunk release. 5. Remote arm/disarm 6. Any trigger will auto-dial the preset phone No. and send SMS. 7. Enquiry the status of your car by any phone. 8. No distance limit to control your cars by any phone or SMS. 9. Remote police alert/monitor/oil cut-off/power off/voice frightening. 10. Can activate/deactive car running. 11. Can prohibit/permit telephone alarm. 12. With hidden emergency button, it can send help signal quietly. 13. With backup battery. 14. With hicker memory and safety reminder. 15. Can start car engine and air conditioner by remoter, phone or SMS to create a comfortable driving environment. 16. Car mobile and GSM location 17. Metal case and hopping code remoter. 18. With GPS function.

Picture

Operating Voltage: DC 12V
Dual-band (850/900/1800/1900MHz)
Working temperature: -20°C-+65°C
Control distance: 20m-100m
Size of mainframe: 108mm*76mm*35mm
G.W.:1.65Kg



GSM ALARM- MODEL G98

Features:

Anti-thief function:

- *Door open/car vibration/car moving/battery low/power disconnected alert.
- * Alert call to user's telephone by voice
- * Stop engine by phone
- * Lock/unlock the door by phone
- * Central lock automation
- * Arming and closing windows automatically if forget.



Anti-rob functions

- * With stealthy SOS button
- * Lock the door automatically against pushing pedal brake.

Other useful functions:

- * Friendly voice operation guide
- * Silent alarm mode available
- * Shock sensor sensitivity adjustment available

V. GSM/GPRS GPS TRACKER

Picture	Model Number:GPS vehicle tracker
<p data-bbox="113 860 233 891">TKS808</p>  	<p data-bbox="584 432 986 463">Description and Main functions</p> <p data-bbox="584 472 683 504">General</p> <p data-bbox="584 512 1449 584">Based on GSM/GPRS and GPS, you can locate and monitor any remote targets by SMS or GPRS.</p> <p data-bbox="584 638 692 669">Features</p> <ul data-bbox="584 678 1477 1249" style="list-style-type: none"> ◆ You can get target's latitude and longitude by SMS or GPRS, and check position by google earth. ◆ Auto Report position. ◆ Send the last location if it enters into the blind area. ◆ Add or change Username and Password. ◆ Monitoring and SOS feature. ◆ It will send an alert of Geofence to the user when it breaches the restricted area. ◆ It will send an alert of movement to the user when it begins to move. ◆ It will send an overspeed alert to the user when the target moves exceed of the restricted speed. ◆ It will send a low battery alert to the user if the battery is low. ◆ It will send an alert of theft to user automatically if the power be cut off or the target be startup illegally. <p data-bbox="596 1258 1034 1290">GSM sensitivity Less than—102dBm</p> <p data-bbox="584 1299 916 1330">GPS chipset SirF III chipset</p> <p data-bbox="584 1339 884 1370">GPS sensitivity -159dBm</p> <p data-bbox="584 1379 804 1411">GPS accuracy 5m</p> <p data-bbox="584 1420 845 1451">Cold/ Hot TTFF 35/2s</p> <p data-bbox="584 1460 1027 1491">Car charger 12—24V input, 5V ouput</p> <p data-bbox="584 1500 1123 1532">Battery Power 3.7V DC Li-Ion Battery,700mA</p> <p data-bbox="584 1541 903 1572">Battery Life About 48hours</p> <p data-bbox="584 1581 1053 1612">Operating Temperature -10°C to +65°C</p> <p data-bbox="584 1621 1031 1653">Storage Temperature -20°C to +70°C</p> <p data-bbox="584 1662 1145 1693">Relative Humidity 5% to 95 %, non-condensing</p> <p data-bbox="584 1787 791 1818">GSM frequency:</p> <p data-bbox="596 1827 1088 1859">GSM900/1800MHZ GSM850/1900MHZ</p>